


SF2000

Ducted Inline Exhaust Kit exhausting 66 litres per second at grille.

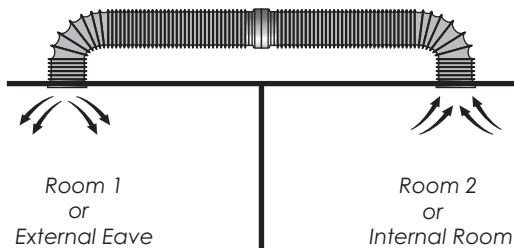

Skydome® SF2000

To Specify

“Mechanical ventilation to be ‘Skydome SF2000’ ducted in-line exhaust kit as manufactured by Skydome Skylight Systems Ltd, phone 131424.

Model: SF2000
 Roof Type: please specify

Features

- ❖ Exhausts hot air from the room to the eave or it can be used as a heat/cool air transfer system.
- ❖ Tested and certified to AS1668.2
- ❖ Suited to mechanical ventilation applications where horizontal ducting is desired.
- ❖ Commercial quality 150mm inline fan for superior performance.
- ❖ Exhausts 66 litres per second at grille.

Model (for required roof profile)

Order Code	Description
SF2000	150mm Inline Kit

Options


Accessories

Additional 3 or 6 metre lengths of Flexiduct (150mm)	
TSTAT-W	Wall mounted Thermostat
FOAMBLOCK	Anti-vibration foam (under motor)
Ceiling Grilles	
CG150/106	150mm Round (adjustable)
CG150/126	150mm Round Down Jet (adjustable)
CG150/MAG	150mm Square with Magnetic Core
CG150/LOUVRE	150mm Square External Grille

NOTE:

Order CG150/LOUVRE when ducting to external eave

SF2000

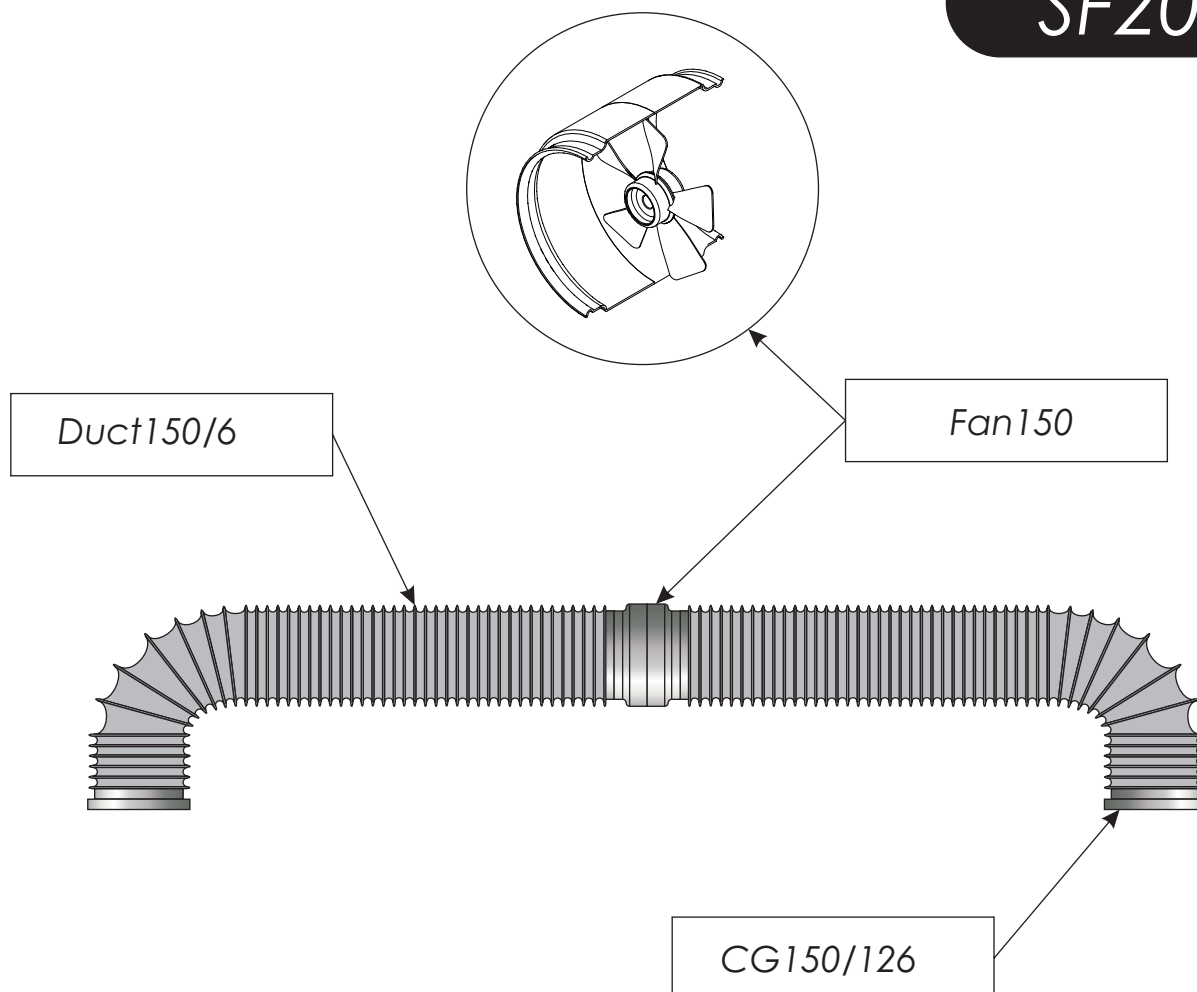

No	Code	Description
	Carton C	
1	Fan150	150mm inline fan
1	Duct150/6	3m Flexible Duct (150mm)
2	CG150/126	Adj. 150mm downjet ceiling grille
4	ST-TAPE/1.2	Aluminium Joining Tape - 1200mm