

Double Glazed, (x2) 4mm
Toughened Glass & 12mm Argon
Gas Gap

Weather Metal Surround

Timber Batten

Corrugated Roof

Foam Insert (Supplied)

Rafter

Joist

Section A-A

Nordic Pine Reveal

Special Pitch Flashing
Required If the Pitch Of the Roof Is
Less Than 15 Degrees.

Foam Insert (Supplied)


Rafter

Timber Support
For Shaft Lining


Plasterboard

Joist

Plan View

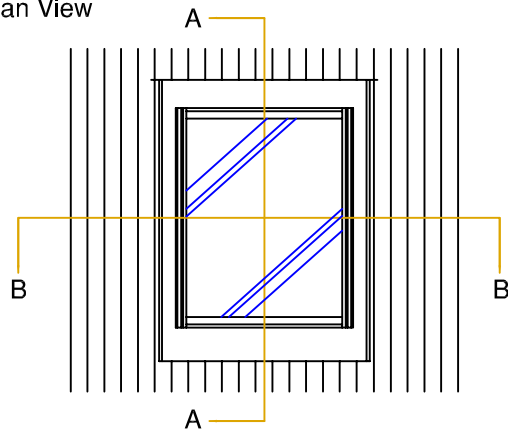

Section B-B

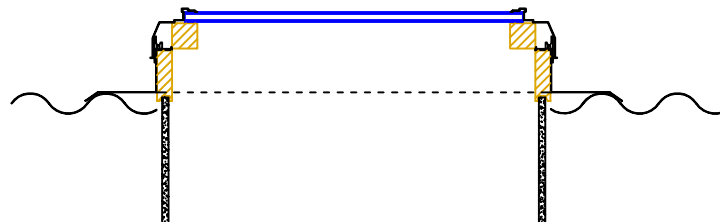

Specification:

Fixed Skywindow - 10 Degree Corrugated Roof

Code:

FSW-Size Of Window
CSD-Size Of Window

Title:	Fixed Skywindow On A Corrugated Roof Section				
Scale:	N.T.S	Detail No.	SS-FSW-CSD-01	Rev.	
Client:					
Project:					
Date:	06.03.06	Job Number.			