

ST250

High performance tubular skylight with 97% total reflective Silvertube™ light shaft for task lighting and small areas.



Model (for required roof profile)

Order Code	Description
ST250TT	Terracotta Tile
ST250CT	Concrete Tile
ST250CR	Corrugated Profile
ST250MD	Metal Deck Profile
ST250SS	Slate or Shingle
ST250UF	Unifit (all purpose)

Options

Upgrade your Skytube® to one of our vented models:

- STV101 - 102 naturally vented
- STV150/250 mechanically vented

Skytube Intech® 250

To Specify

“Natural light to be ‘Skytube Intech® 250’ as manufactured by Skydome Skylight Systems Ltd, phone 131424.

Model: ST250
Roof Type: please specify (refer order codes below)

**Recommended additional text in specification:*

Must be third party certified compliant to AS4285.
Kit must contain 97% reflective tube, variable pitch adaptor (VPA) and Intech device. Phone 131424... sales@skydome.com.au


Features

- ❖ Patented Intech® light intercepting device captures low elevation sunlight from any direction (a world first) providing improved performance morning and afternoon when the sun is at its weakest.
- ❖ Patented Variable Pitch Adapter (VPA) optimises light throughput. It allows the Skytube® to be installed almost anywhere without the need for light reducing angle adapters, providing a direct path for the light from roof to ceiling ‘because light doesn’t travel around corners’.
- ❖ High performance Silvertube™ light shaft providing 97% total reflectance.
- ❖ Easily installed into most roof types using Skydomes unique roof profiles.
- ❖ Ideal for Bathrooms/WC’s/Ensuites/Hallways/WIR and all task lighting applications.
- ❖ Tested and certified to AS4285 (skylights).
- ❖ Benchmark product for energy efficiency, current energy rating schemes are not sophisticated enough to rate the Intech® products, however research is currently underway to overcome this failing.

Accessories

- Silvertube™ light shaft in 600mm increments.
- Ceiling Starter
- Skylamp (Electric light fitting)
- Chrome ceiling ring
- Gold ceiling ring
- Leadlight diffusers
- Opaque diffuser (50% blackout)
- Whiteout diffuser (90% blackout)

ST250

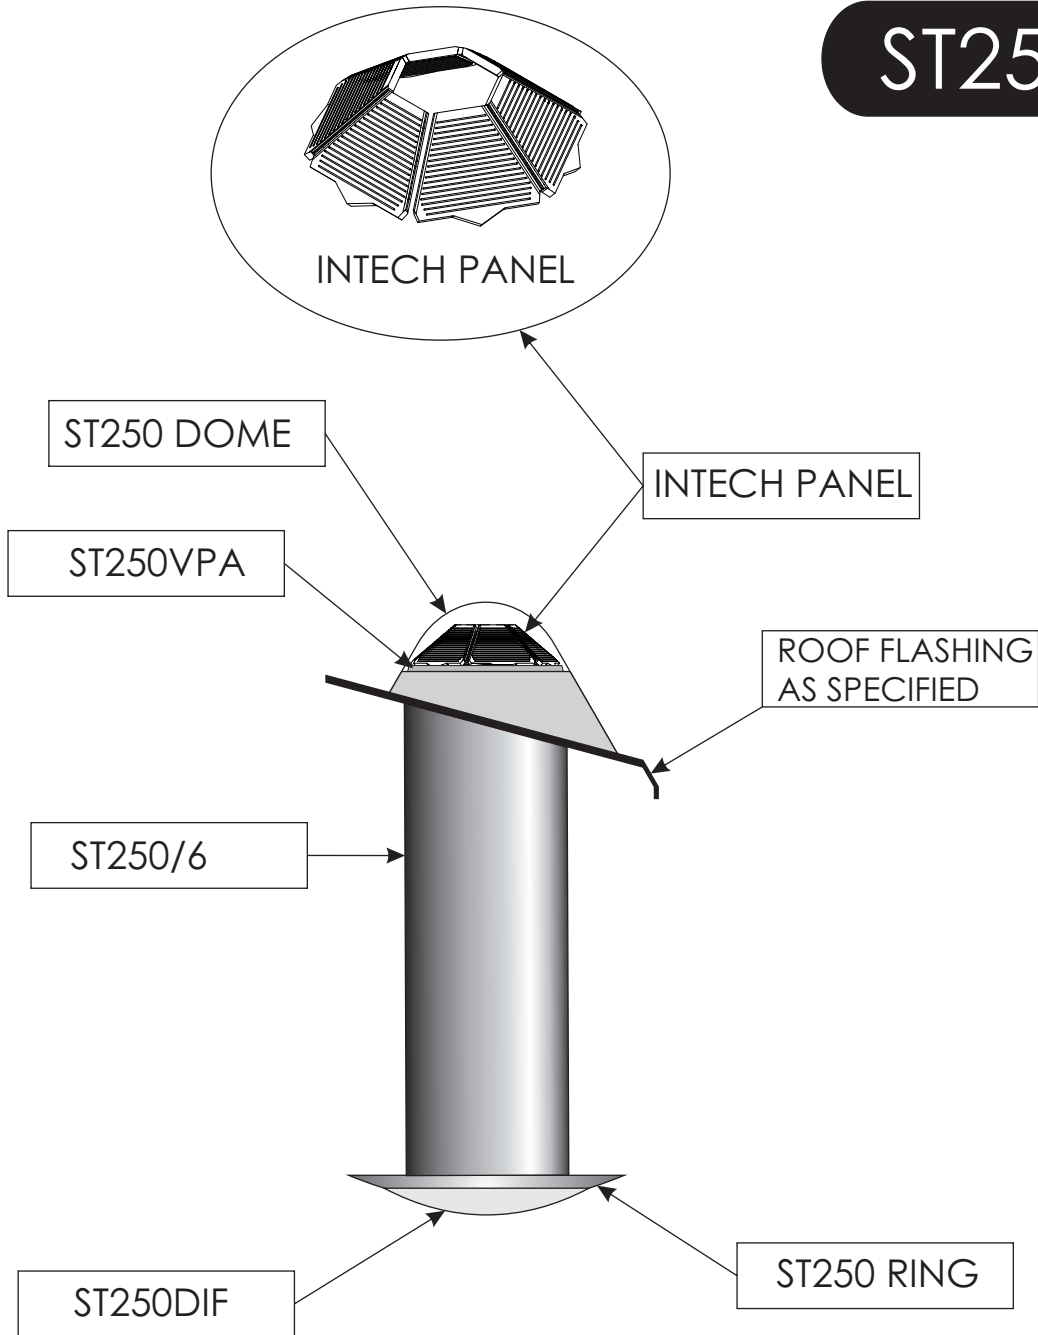

No	Code	Description
Carton A		
1	ST250DOME	Clear Dome - 250mm
1	ST250INTECH	Intech Panel - 250mm
1	ST250VPA	Variable Pitch Adapter - 250mm
1	ST250RING	Ceiling Ring - 250mm
1	ST250DIF	Luxmaster Decor Lens
1	ST250ACC	Tube Accessory Bag
1	ST250FLA/XX	Roof Flashing Profile (refer order codes)
1	ST250ACC/XX	Flashing Accessory bag
1	ST250FIX	Installation Instructions
1	ST250TPLATE	Ceiling Ring Template
	ST250/6	600mm Silvertube™ shaft
	ST-TAPE/6	Aluminium Joining Tape - 600mm